



Levellogger® 5

Model 3001

The Levellogger 5 records highly accurate groundwater and surface water level and temperature measurements. It combines a pressure sensor, temperature detector, 10-year lithium battery, and datalogger, sealed within a 22 mm x 160 mm (7/8" x 6.3") stainless steel housing with a corrosion-resistant coating baked-on using polymerization technology.

The Levellogger 5 measures absolute pressure using a Hastelloy® pressure sensor, offering high resolution and an accuracy of 0.05% FS. Readings are stable in extreme pressure and temperature conditions. The Hastelloy sensor can withstand 2 times over-pressure without permanent damage. Combined with the durable coating inside and out, the Levellogger 5 has high corrosion and abrasion resistance in harsh environments.

The Levellogger 5 uses a Faraday cage design, which protects against power surges or electrical spikes caused by lightning. Its durable maintenance-free design, high accuracy and stability, make the Levellogger 5 the most reliable instrument for long-term, continuous water level recording.

Levellogger 5 Features

- Highly stable communication: single-eye optical interface—easier to clean, more scratch resistant
- Large memory: 150,000 sets of data
- Strong, robust design: double o-ring seals for increased leakage protection
- High thermistor sensitivity: accurate platinum RTD
- Superior protection in harsh environments: corrosion and abrasion resistant coating—inside and out
- Intuitive Levellogger Software: Diagnostic Utility for more proactive user “self-tests”



Single-eye optical interface

The Levellogger 5 features a smooth, single-eye optical interface, which allows for easy cleaning and more reliable, faster communication. Using a Solinst USB device, including the Field Reader 5 and Levellogger PC Software, programming and data downloading speeds are 57,600 bps.



Fast communication and downloading speeds with a high speed Field Reader 5

Applications

- Aquifer characterization: pumping tests, slug tests, etc.
- Watershed, drainage basin and recharge monitoring
- Stream gauging, lake and reservoir management
- Harbour and tidal fluctuation measurement
- Wetlands and stormwater run-off monitoring
- Water supply and tank level measurement
- Mine water and landfill leachate management
- Long-term water level monitoring in wells, surface water bodies and seawater environments

Flexible Communication

Levellogger Software is streamlined, making it easy to program dataloggers, and view and compensate data in the office or the field. Data compensation is made simple; multiple data files can be barometrically compensated at once.

The Levellogger 5 App Interface on your in-field Levelloggers creates a *Bluetooth®* connection between your dataloggers and the Solinst Levellogger App on your smart device. The Solinst Readout Unit (SRU) connects to your deployed Levelloggers

to display and save real-time water level readings that are automatically barometrically compensated. Also an option, the DataGrabber 5 is a field-ready USB data transfer unit.

Remote monitoring options include the LevelSender 5, a simple and compact device that fits right in a 2" well, SolSat 5 Satellite Telemetry, STS Telemetry Systems, and the RRL 5 Remote Radio Link. In addition, Levellogger 5 Series dataloggers are SDI-12 and MODBUS compatible.

Levellogger Setup

Programming Levelloggers is extremely intuitive. Simply connect to a PC using an Optical Reader (Desktop Reader 5 or Field Reader 5) or PC Interface Cable. Use a single screen to fill in your project information and sampling regime. Templates of settings can be saved for easy re-use.

The Levellogger time may be synchronized to the computer clock. There are options for immediate start or future start and stop times. The percentage battery life remaining and the amount of free memory are indicated on the settings screen.


Levelloggers can also be programmed with a sampling regime and start/stop times using the Solinst Levellogger App on your smart device.

Convenient Sampling Options

Levelloggers can be programmed with linear, event-based, or a user-selectable sampling schedule. Linear sampling can be set from 1/8 second to 99 hours.

Event-based sampling can be set to record when the level changes by a selected threshold. Readings are checked at the selected time interval, but only recorded in memory if the condition has been met. A default reading is taken every 24 hours if no "event" occurs.

The Schedule option allows up to 30 schedule items, each with its own sampling rate and duration. For convenience, there is an option to automatically repeat the schedule.

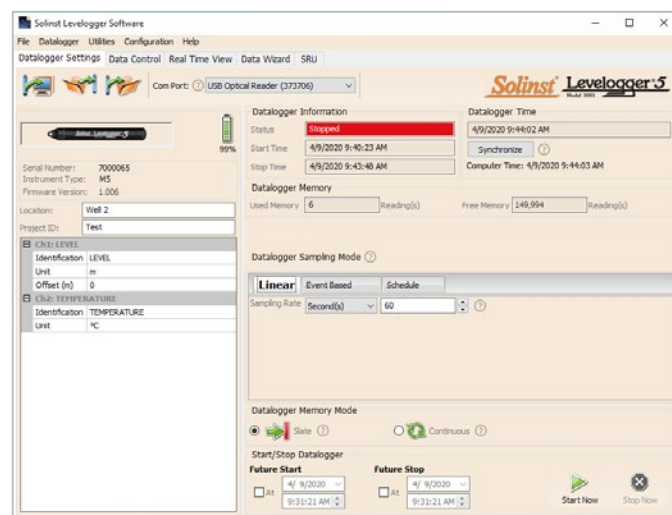

Data Download, Viewing and Export


Data is downloaded to a PC with the click of a screen icon. There are multiple options for downloading data, including 'Append Data' and 'All Data'. The software also allows immediate viewing of the data in graph or table format using 'Real Time View'.

Level data is automatically compensated for temperature; the temperature data is also downloaded. Barometric compensation of Levellogger data is performed using the Data Wizard, which can also be used to input manual data adjustments, elevation, offsets, density, and adjust for Barometric efficiency. The Levellogger Software allows easy export of the data into a spreadsheet or database for further processing.

The Solinst Levellogger App also allows you to view and save real-time or logged data right on your smart device, or you can view and save the data using an SRU.

Helpful Utilities

The Diagnostic Utility can be used in case of an unexpected problem. It checks the functioning of the program, calibration, backup and logging memories, the pressure transducer, temperature sensor and battery voltage, as well as enabling a complete Memory Dump, if required. A firmware upgrade will be available from time to time, to allow upgrading of the Levellogger 5, as new features are added.

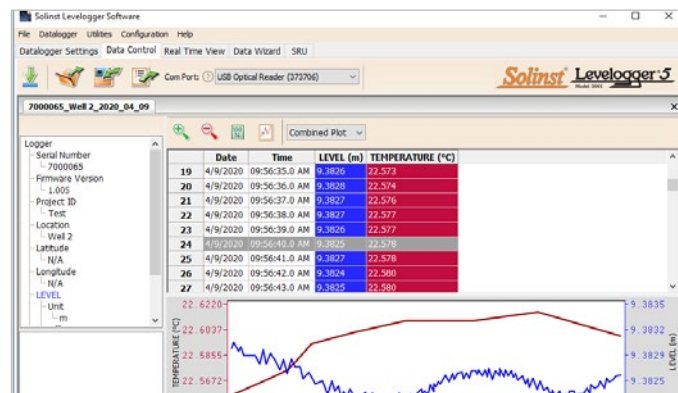

Levellogger 5 App Interface

The Levellogger 5 App Interface uses *Bluetooth®* technology to connect your Levellogger to your smart device. With the Solinst Levellogger App, you can download data, view real-time data, and program your Levelloggers. Data can be e-mailed from your smart device directly to your office (see Model 3001 Levellogger 5 App Interface data sheets).

*The Apple logo is a trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Solinst Canada Ltd. is under license.



Solinst Readout Unit (SRU)

Connect an SRU to an in-field Levellogger via an L5 Direct Read Cable or L5 Threaded or Slip Fit Adaptor to display instant water level readings, Levellogger status, save a real-time logging session, and download data to the SRU memory.



DataGrabber 5

The DataGrabber 5 is a field-ready data transfer device that allows you to copy data from a Levellogger onto a USB flash key (Dual USB & USB-C key provided). The DataGrabber 5 is compact and very easy to transport. It connects to the top end of a Levellogger's Direct Read Cable, or directly to a Levellogger using an adaptor. One push-button is used to download all of the data in a Levellogger's memory to a USB device.



LevelSender 5 Telemetry

The LevelSender 5 is a simple, low cost cellular telemetry system designed to send data from Levelloggers in the field to the Solinst Cloud, or via FTP to a location of your choice (email and SMS are also options). There is two-way communication between the LevelSender 5 and Home Station, allowing remote updates. LevelSender 5 stations are compact in design, which allows them to be discreetly installed inside a 2" (50 mm) well (see Model 9500 data sheet).



STS Telemetry

STS Telemetry provides an efficient method to send Levellogger data from the field to your desktop. Cellular communication options give the flexibility to suit any project. STS Systems are designed to save costs by enabling the self-management of data. Alarm notification, remote firmware upgrades and diagnostic reporting make system maintenance simple (see Model 9100 data sheet).



SolSat 5 Satellite Telemetry

The SolSat 5 Satellite Telemetry uses Iridium satellite technology to provide global connectivity for your remote water monitoring projects. The SolSat 5 is simple to set up with Solinst dataloggers using an intuitive and secure Wi-Fi App on your smart device. The SolSat 5 features a built-in barometer, solar panel and a compact weatherproof enclosure for deployment almost anywhere.



RRL 5 Remote Radio Link

The RRL 5 Remote Radio Link is ideal for closed-loop, short range applications up to 30 km (20 miles) – ideal for mine sites and golf courses. Fits in a 2" (50 mm) well. Barometrically compensated water levels can be obtained and reported using the built-in barometer. Connect up to two dataloggers. (see Model 9200 data sheet).

Standard Cable Deployment

Levelloggers may be suspended on a stainless steel wireline or Kevlar® cord. This is a very inexpensive method of deployment, and if in a well, allows the Levellogger to be easily locked out of sight and inaccessible. Solinst offers wireline and cord assemblies in a variety of lengths.

Solinst 3001 Well Cap Assembly

The 2" Locking Well Caps are designed for both standard and Direct Read Cable deployment options.

The well cap has a convenient eyelet for suspending Levelloggers using wireline or Kevlar cord. The Well Cap insert has two openings to accommodate direct read cables for both a Levellogger and Barologger. Adaptors are available to fit 4" wells.

The cap is vented to equalize atmospheric pressure in the well. It slips over the casing, and can be secured using a lock with a 9.5 mm (3/8") shackle diameter.



*Levellogger 2" Locking Well Cap Installations
(see Well Caps data sheet for more details)*

L5 Direct Read Cables

When it is desired to get real-time data and communicate with Levelloggers without removal from the water, they can be deployed using L5 Direct Read Cables. This allows viewing of data, downloading, and programming in the field using a portable PC, or Solinst Levellogger 5 App Interface. You can view and save data to an SRU, or just download data with a DataGrabber 5.

Levelloggers can be connected to an SDI-12 or MODBUS datalogger using the Solinst SDI-12/MODBUS Interface Cable attached to a L5 Direct Read Cable.

Cable Specifications

L5 Direct Read Cables are available for attachment to any Levellogger in lengths up to 1500 ft. The 3.175 mm dia. (1/8") coaxial cable has an outer polyurethane jacket for strength and durability. The stranded stainless steel conductor gives non-stretch accuracy.

*Barologger 5 and Levellogger 5
installed in Well Using
L5 Direct Read Cables*



Accurate Barometric Compensation

Levelloggers measure absolute pressure (water pressure + atmospheric pressure) expressed in feet, meters, centimeters, psi, kPa, or bar.

The most accurate method of obtaining changes in water level is to compensate for atmospheric pressure fluctuations using a Barologger 5, avoiding time lag in the compensation.

The Barologger 5 is set above high water level in one location on site. One Barologger can be used to compensate all Levelloggers in a 30 km (20 mile) radius and/or with every 300 m (1000 ft.) change in elevation.

The Levellogger Software Data Compensation Wizard automatically produces compensated data files using the synchronized data files from the Barologger and Levelloggers on site.

The Barologger 5 uses pressure algorithms based on air rather than water pressure, giving superior accuracy.

The recorded barometric information can also be very useful to help determine barometric lag and/or barometric efficiency of the monitored aquifer.

The Barologger 5 records atmospheric pressure in psi, kPa, or mbar. When compensating submerged Levellogger 5, Edge, Gold or Junior data, Levellogger Software can recognize the type of Levellogger and compensate using the same units found in the submerged data file (e.g. feet or meters). This makes the Barologger 5 backwards compatible.

*Synchronize and Simplify
Barometric Compensation
Across Entire Site*



Levellogger 5 Specifications

| | |
|----------------------------|--|
| Level Sensor: | Piezoresistive Silicon with Hastelloy Sensor |
| Accuracy: | ± 0.05% FS (Barologger 5: ± 0.05 kPa) |
| Stability of Readings: | Superior, low noise |
| Resolution: | 0.002% FS to 0.0006% FS |
| Units of Measure: | m, cm, ft., psi, kPa, bar, °C, °F (Barologger 5: psi, kPa, mbar, °C, °F) |
| Normalization: | Automatic Temperature Compensation |
| Temp. Comp. Range: | 0° to 50°C (Barologger 5: -10 to +50°C) |
| Temperature Sensor: | Platinum Resistance Temperature Detector (RTD) |
| Temp. Sensor Accuracy: | ± 0.05°C |
| Temp. Sensor Resolution: | 0.003°C |
| Battery Life: | 10 Years – based on 1 reading/minute |
| Clock Accuracy (typical): | ± 1 minute/year (-20°C to 80°C) |
| Operating Temperature: | -20°C to 80°C |
| Maximum # Readings: | 150,000 sets of readings |
| Memory Mode: | Slate and Continuous |
| Communication: | Optical high-speed: USB, SDI-12, MODBUS 57,600 bps with USB |
| Size: | 22 mm x 160 mm (7/8" x 6.3") |
| Weight: | 146 grams (5.2 oz) |
| Corrosion Resistance: | Baked-on coating using polymerization tecUology (inside and out) |
| Other Wetted Materials: | Delrin®, Viton®, 316L stainless steel, Hastelloy, PFAS-free PTFE coating |
| Sampling Modes: | Linear, Event & User-Selectable with Repeat Mode, Future Start, Future Stop, Real-Time View |
| Measurement Rates: | 1/8 sec to 99 hrs |
| Barometric Compensation: | Software Wizard and one Barologger 5 in local area (approx. 30 km/20 miles radius) |

| Models | Full Scale (FS) | Accuracy | Resolution |
|-------------|-------------------|----------------------|------------|
| Barologger | Air only | ± 0.05 kPa | 0.002% FS |
| M5 | 5 m (16.4 ft.) | ± 0.3 cm (0.010 ft.) | 0.001% FS |
| M10 | 10 m (32.8 ft.) | ± 0.5 cm (0.016 ft.) | 0.0006% FS |
| M20 | 20 m (65.6 ft.) | ± 1 cm (0.032 ft.) | 0.0006% FS |
| M30 | 30 m (98.4 ft.) | ± 1.5 cm (0.064 ft.) | 0.0006% FS |
| M100 | 100 m (328.1 ft.) | ± 5 cm (0.164 ft.) | 0.0006% FS |
| M200 | 200 m (656.2 ft.) | ± 10 cm (0.328 ft.) | 0.0006% FS |

Low Cost Datalogging: See Levellogger 5 Junior data sheet.

Vented Dataloggers: See Model 3250 LevelVent 5 data sheet.

Conductivity Datalogging: See Levellogger 5 LTC data sheet.



Versatile Submersible Water Level Transmitter:

Solinst also offers the Model 301 Water Level Temperature Sensor for communication using MODBUS or SDI-12, interchangeably with just one probe. It provides continuous, stable water level and temperature readings with options for absolute (non-vented) and gauged (vented) pressure sensor setups. The Water Level Temperature Sensor is easy to integrate into existing monitoring systems, e.g. SCADA or PLC, and used to measure hydrostatic liquid levels long-term in industrial, municipal, and environmental applications. See Model 301 WLT Sensor data sheet.